


Sib. Larch (wildlife) Grade B/C

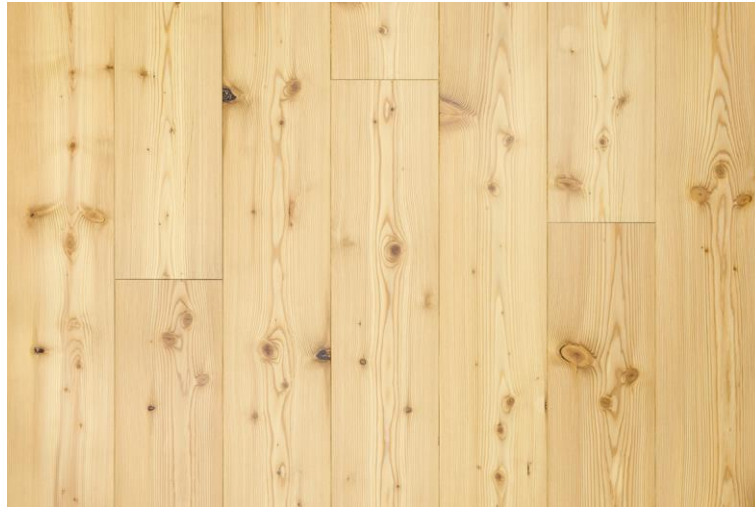

Knots

- Black pin knots up to 5 mm
- Sound, ingrown knots up to 10 % of the width + 50 mm permitted
- Partially ingrown, black edged and unsound knots: 10 % of the width + 50 mm
- Knocked-out areas in knots: up to 40 % of knot surface
- Knotholes may occur

Cracks

- End cracks, up to max. 300 mm long
- Surface cracks: up to max. 600 mm long

Resin pockets

- Up to 150 mm long, max. 8 mm wide, max. 10 per board

Natural colour variation

- Permitted
- Bark pockets and box tree (pressure wood) permitted
- Sound sapwood
- Plane knocks permitted

Pest attack

- Inadmissible

Special features

- Unplaned areas and reductions in board widths permitted

Production and sorting implemented according to factory standards based on EN 13629 (solid hardwood boards). Occasional deviations in grade cannot be completely ruled out. Provided that this amount is less than 5 per cent of the ordered quantity, there are no grounds for claim. Wood is a natural product and is characterized by variations in colour and structure.